

MS-328-3



MS-328-3

Standard Reed Sensor Flatpack

Electrical Characteristics @ 25 °

Contact form		A
Contact rating max.	W / VA	10
Switching voltage max.	VDC	200
	VAC	140
Switching current max.	A	1
Carry current max.	A	1.2
Breakdown voltage min.	VDC	240
Total resistance max. (initial)	mΩ	150
Insulation resistance min.	Ω	10 ¹⁰

Features

- Adjustable switching point
- Various sensitivity ranges available
- Customized types available
- typ. Load resistive

Magnetical Characteristics (of unmodified Reed Switch) @ 25 °

Pull in range available	AT	10 - 25
Drop out min.	AT	4
Test coil	TC -	014
Test equipment tolerance	± AT	2

Operating Characteristics (of unmodified Reed Switch) @ 25 °

Switching frequency max.	Hz	500
Resonant frequency typ.	Hz	4000
Operate time max. (incl. bounce)	ms	1
Release time max.	ms	0.4

Approvals



Contact PIC for Agency Ratings!

Environmental Characteristics

Operating temperature	°C	-20 to + 85
Vibration (50-2000 Hz)	g	20
Shock (1/2 sin 11 ms)	g	100

Ordering Information

Packing Unit	25 pcs
Weight per piece	10.4 g
Weight per package	270 g
Standard AT Ranges	

- 1 = 10 to 15 AT
- 2 = 15 to 20 AT
- 3 = 20 to 25 AT


Ordering Example

MS-328-3-2 describes MS-328-3 with 15 to 20 AT.

Remarks

When mounted onto ferromagnetic parts switching distance of MS-328-3 may reduce. Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.

Dimensions in mm

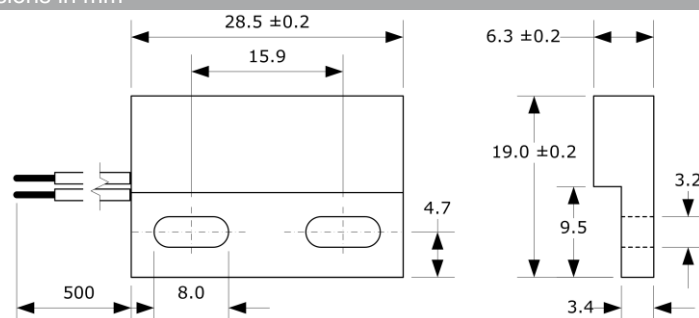

Material Information

	Material	Colour
Housing	PA-GF	black
Cable	UL 1007/1569, AWG 20, 4 mm stripped and tinned	black
Potting compound	Epoxy	black