

## MS-328-5



## MS-328-5

Mains switching Reed Sensor  
Flatpack

Electrical Characteristics		@ 25 °C
Contact form		A
Contact rating max.	W / VA	10
Switching voltage max.	VDC	200
	VAC	260
Switching current max.	A	0.3
Carry current max.	A	1.4
Breakdown voltage min.	VDC	400
Total resistance max. (initial)	mΩ	150
Insulation resistance min.	Ω	10 <sup>10</sup>

Features
➤ Standard Flatpack, mains voltage
➤ Adjustable switching point
➤ Various sensitivity ranges available
➤ typ. Load resistive

Magnetical Characteristics (of unmodified Reed Switch)		@ 25 °C
Pull in range available	AT	15 - 30
Drop out min.	AT	4
Test coil	TC -	200
Test equipment tolerance	± AT	1

Approvals





Operating Characteristics (of unmodified Reed Switch)		@ 25 °C
Switching frequency max.	Hz	400
Resonant frequency typ.	Hz	4000
Operate time max. (incl. bounce)	ms	0.6
Release time max.	ms	0.2


Environmental Characteristics		
Operating temperature	°C	-20 to + 85
Vibration (50-2000 Hz)	g	30
Shock (1/2 sin 11 ms)	g	100

Ordering Information	
Packing Unit	25 pcs
Weight per piece	10.8 g
Weight per package	280 g
Standard AT Ranges	

2 = 15 to 20 AT  
 3 = 20 to 25 AT  
 4 = 25 to 30 AT

Ordering Example  
 MS-328-5-2 describes MS-328-5 with 15 to 20 AT.

**Remarks**  
 When mounted onto ferromagnetic parts switching distance of MS-328-5 may reduce. Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.

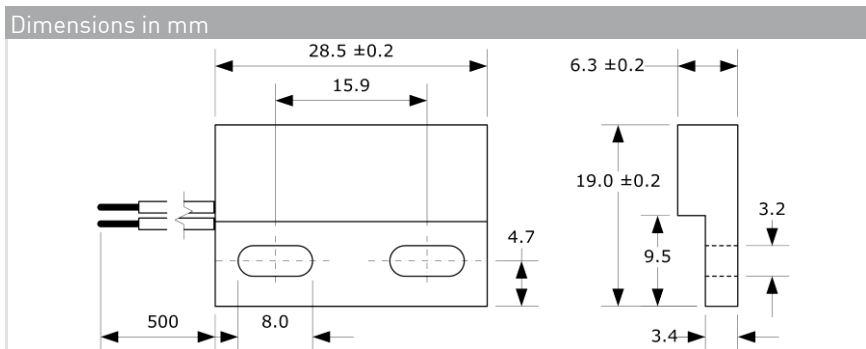

Material Information		
Housing	Material PA-GF	Colour black
Cable	UL 1007/1569, AWG 20, 4 mm stripped and tinned	black
Potting compound	Epoxy	black