


HS-3511-01-0300



Product image serves as example only.

Block Diagram

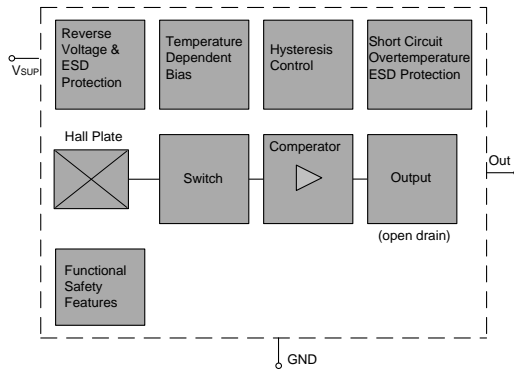

HS-3511-01-0300

Bipolar 3 - Wire

Flange Mount Hall Effect Sensor

Features

- › Compact size
- › Various switching sensitivities
- › Customized types available

Approvals




Absolute Maximum Ratings

Stresses beyond those listed in the "Absolute Maximum Ratings" may cause permanent damage to the device
Functional operation of the device at these conditions is not implied. Exposure to the absolute rating conditions for extended periods will affect device reliability

| Symbol | Parameter | wire colour | Min. | Max. | Unit | Conditions |
|------------------|------------------------|-------------|-------|------|------|---|
| V _{SUP} | Supply voltage | red | - 18 | | V | t < 1000 h ¹⁾ |
| | | | - | 28 | V | t < 96 h ¹⁾ |
| | | | - | 32 | V | t < 5 min ¹⁾ |
| | | | - | 40 | V | t < 5 x 400 ms ¹⁾ with series resistor R _v > 100 Ohm |
| V _{OUT} | Output voltage | white | - 0.5 | | V | t < 1000 h ¹⁾ |
| | | | - | 28 | V | t < 96 h ¹⁾ |
| | | | - | 32 | V | t < 5 min ¹⁾ |
| | | | - | 40 | V | t < 5 x 400 ms ¹⁾ with series resistor R _v > 100 Ohm |
| I _O | Output current | white | - | 65 | mA | |
| I _{OR} | Reverse output current | white | - 50 | | mA | |

¹⁾ No cumulative stress All voltages listed are referenced to ground (GND)

Dimensions

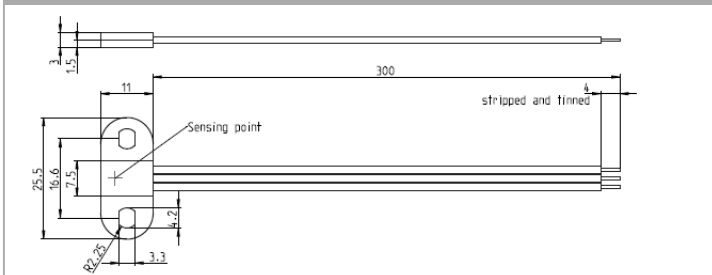

Wire Assignment

| Name | Function | Cable colour |
|------|----------------|--------------|
| VSUP | Supply voltage | red |
| OUT | Output | white |
| GND | Ground | black |

HS-3511-01-0300
 wire length [mm]

Material Information

| | Material | Colour |
|------------------|---------------------|-------------------|
| Housing | PA6 | black |
| Cable | UL1007/1569, AWG 24 | red, white, black |
| Potting compound | Epoxy | black |

Environmental Characteristics

| | | |
|-----------------------|----|--------------|
| Operating temperature | °C | - 20 to + 85 |
|-----------------------|----|--------------|

HS-3511-01-0300



HS-3511-01-0300

Bipolar 3 - Wire

Flange Mount Hall Effect Sensor

Characteristics

At recommended operation conditions if not otherwise specified in the column "Conditions".

Typical characteristics for $T_J = 25\text{ }^\circ\text{C}$ and $V_{SUP} = 12\text{ V}$

| Symbol | Parameter | wire colour | Min. | Typ. | Max. | Unit | Conditions |
|--------|-----------|-------------|------|------|------|------|------------|
|--------|-----------|-------------|------|------|------|------|------------|

Supply

| | | | | | | | |
|-------------|-----------------|-----|--|-----|-----|----|------------------------------|
| I_{SUP} | Supply current | red | | 1.6 | 2.4 | mA | |
| I_{SUPHi} | Reverse current | | | | 1 | mA | for $V_{SUP} = -18\text{ V}$ |

Output

| | | | | | | | |
|------------|---|-------|-----|------|------|---------------|--|
| V_{ol} | Port low output voltage | white | | 0.13 | 0.4 | V | $I_o = 20\text{ mA}$ |
| | | | | | 0.5 | V | $I_o = 25\text{ mA}$ |
| t_f | Output fall time ¹⁾ | | | | 1 | μs | ¹⁾ $V_{SUP} = 12\text{ V}$; $R_L = 820$; $C_L = 20\text{ pF}$ |
| t_r | Output rise time | | | | 1 | μs | |
| t_d | Delay time ¹⁾ | | | 16 | | μs | |
| t_{samp} | Output refresh period | | 1.6 | 2 | 2.66 | μs | |
| t_{en} | Enable time of output after settling of V_{SUP} | | | 50 | | μs | $V_{SUP} = 12\text{ V}$ $B > B_{on} + 2\text{ mT}$ or $B < B_{off} - 2\text{ mT}$ |

Power-on-self-test


Self test can be triggered externally; details on request

¹⁾ Guaranteed by design

Recommended Operating Conditions

| Symbol | Parameter | wire colour | Min. | Max. | Unit | Conditions |
|-----------|----------------|-------------|------|------|------|------------|
| V_{SUP} | Supply voltage | red | 2.7 | 24 | V | |
| V_{OUT} | Output voltage | white | | 24 | V | |
| I_{OUT} | Output current | white | | 25 | mA | |

Off-center position of sensing point



HS-3511-01-0300



HS-3511-01-0300

Bipolar 3 - Wire

Flange Mount Hall Effect Sensor

Magnetic Characteristics Overview

| Symbol | Parameter | wire colour | Min. | Typ. | Max. | Unit | Conditions |
|-------------------|---|-------------|------|------|--------|-------|------------|
| B _{ONth} | ON threshold range ¹⁾ | - | - 30 | | 30 | mT | |
| B _{OOth} | OFF threshold range ¹⁾ | - | - 30 | | 30 | mT | |
| B _{th} | Adjustable step size ²⁾ | - | | 0.5 | | mT | |
| T _C | Temperature compensation of magnetic thresholds ³⁾ | - | 0 | | - 3000 | ppm/K | |

¹⁾ Available range

²⁾ Small steps at small values, bigger steps at higher values. May not be undercut

³⁾ Different temperature compensation available on request

Magnetic Characteristics

| Switching Type | Temp. coeff. of magnetic thresh. TC [ppm/K] | On point B _{ON} | | | Off point B _{OFF} | | | Hysteresis BHYS ¹⁾ | | |
|----------------|--|--------------------------|-----------|------|----------------------------|-----------|------|-------------------------------|-----------|------|
| | | Min. | Typ. [mT] | Max. | Min. | Typ. [mT] | Max. | Min. | Typ. [mT] | Max. |
| bipolar | 0 | tbd. | 0.5 | tbd. | tbd. | - 0.5 | tbd. | - | 1.0 | - |
| | | A | B | C | D | E | F | | | |

¹⁾ The hysteresis is the difference between the switching points B_{HYS} = B_{ON} - B_{OFF}

Magnetic Approach (for example)

